

USN

--	--	--	--	--	--	--	--	--	--

10EE55

Fifth Semester B.E. Degree Examination, Dec.2016/Jan.2017
Modern Control Theory

Time: 3 hrs.

Max. Marks:100

Note: Answer FIVE full questions, selecting at least TWO questions from each part.

PART - A

- 1 a. Obtain the state model of the system whose transfer function is given by,

$$G(s) = \frac{s^2 + 2s + 1}{s^3 + 3s^2 + 4s + 5}$$
 (06 Marks)
- b. Obtain the state model of armature controlled DC motor. (10 Marks)
- c. Mention the advantages of modern control theory. (04 Marks)

- 2 a. A system is described by the, $A = \begin{bmatrix} 0 & 1 & 0 \\ 0 & 0 & 1 \\ -2 & -4 & -3 \end{bmatrix}$. Find eigen values, eigen vector and modal matrix. (08 Marks)
- b. Obtain the state model of mechanical system shown in Fig. Q2 (b) by using minimum number of state variables. (06 Marks)

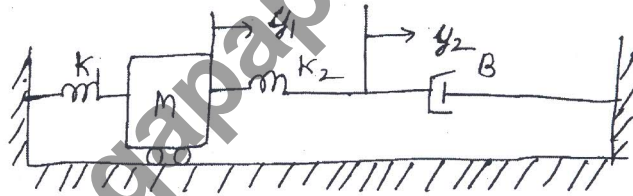


Fig. Q2 (b)

- c. Obtain the state model of the electrical network shown in Fig. Q2 (c) by choosing $v_1(t)$ and $v_2(t)$ as state variables. (06 Marks)

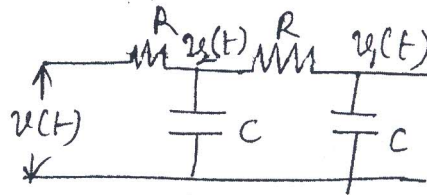


Fig. Q2 (c)

- 3 a. What are the properties of state transition matrix? (04 Marks)
- b. Obtain state transition matrix for the system described by $\dot{x}(t) = \begin{bmatrix} 0 & 1 \\ -4 & -4 \end{bmatrix} x(t)$ by,
 (i) L.T. method (ii) C-H technique. (10 Marks)
- c. Obtain the transfer function of the following system:

$$A = \begin{bmatrix} -1 & 0 & 1 \\ 1 & -2 & 0 \\ 0 & 0 & 3 \end{bmatrix}, B = \begin{bmatrix} 0 \\ 0 \\ 1 \end{bmatrix}, C = \begin{bmatrix} 1 \\ 1 \\ 0 \end{bmatrix}^T$$
 (06 Marks)

Important Note : 1. On completing your answers, compulsorily draw diagonal cross lines on the remaining blank pages.
2. Any revealing of identification, appeal to evaluator and /or equations written eg, 42+8 = 50, will be treated as malpractice.

- 4 a. Define controllability and observability. (04 Marks)
 b. Find the step-response for the system represented by state equation,

$$\dot{X} = AX + BU \text{ and } Y = CX \text{ where}$$

$$A = \begin{bmatrix} 0 & 1 \\ -6 & -5 \end{bmatrix}; B = \begin{bmatrix} 0 \\ 1 \end{bmatrix}; C = [1 \quad 0]$$

(10 Marks)

- c. Check controllability and observability of the following model:

$$A = \begin{bmatrix} 0 & 0 & 0 \\ 1 & 0 & -3 \\ 0 & 1 & -4 \end{bmatrix}, B = \begin{bmatrix} 40 \\ 10 \\ 0 \end{bmatrix}, C = [0 \quad 0 \quad 1]$$

(06 Marks)

PART - B

- 5 a. Explain the following:
 (i) P + D controller (ii) P + I controller (iii) P + I + D controller (06 Marks)

- b. Consider the system defined by,

$$\dot{x} = Ax + Bu, \text{ where } A = \begin{bmatrix} 0 & 1 & 0 \\ 0 & 0 & 1 \\ -1 & -5 & -6 \end{bmatrix}, B = \begin{bmatrix} 0 \\ 0 \\ 1 \end{bmatrix}. \text{ By using state feedback control}$$

$u = -Kx$ it is desired to have closed loop poles at $s = -1 \pm j1$, $s = -10$. Determine the state feedback gain matrix K. (08 Marks)

- c. Design full order state observer with the block diagram. (06 Marks)

- 6 a. What is non-linear system? What are the properties of non-linear system? Explain them. (08 Marks)

- b. Explain the following non linearities :

- (i) Relay with dead zone (ii) Backlash (iii) Saturation (iv) Friction. (12 Marks)

- 7 a. What are singular points? Explain them. (06 Marks)

- b. Explain isoclines method of sending phase trajectories. (06 Marks)

- c. Construct phase trajectory by delta method for non linear system represented by differential equation $\ddot{x} + 4\dot{x} + 4x = 0$. Choose initial conditions as $x(0) = 1.0$ and $\dot{x}(0) = 0$. (08 Marks)

- 8 a. Define (i) Positive definiteness (ii) Negative definiteness (iii) Indefiniteness (06 Marks)

- b. Explain Liapunov stability theorem. (06 Marks)

- c. Use Krasoookii's method to show that the equilibrium state $x = 0$ of the system described by,

$$\dot{x}_1 = -3x_1 + x_2$$

$$\dot{x}_2 = x_1 - x_2 - x_2^3$$

is asymptotically stable in large.

(08 Marks)

* * * * *